

FEATURES

- | Fast Switching Speed
- | Surface Mount Package Ideally Suited for Automatic Insertion
- | For General Purpose Switching Applications
- | High Conductance



DO-35

APPLICATIONS

- | High-speed switching
- | This diode is also available in MiniMELF case with the type designation LL4148

APPROVALS

RoHS	Compliance with 2011/65/EU
HF	Compliance with IEC61249-2-21:2003

MAXIMUM RATINGS ($T_A=25^{\circ}\text{C}$)

Parameter	Symbol	Value	Unit
Peak Reverse Voltage	V_{RRM}	100	V
Reverse Voltage	V_{RMS}	75	V
Average Rectified Forward Current	$I_{F(AV)}$	0.2	A
Non-repetitive Peak Forward Surge Current	I_{FSM}	0.5	A
		1.0	A
		4.0	A
Power Dissipation	P_{tot}	500 ¹⁾	mW
Junction Temperature	T_J	-55 ~ +200	°C
Storage Temperature Range	T_{STG}	-65 ~ +200	°C

ELECTRICAL CHARACTERISTICS($T_A=25^{\circ}\text{C}$)

Parameter	Symbol	Min.	Max.	Unit
Forward Voltage at $I_F = 10\text{ mA}$	V_F		1	V
Leakage Current at	I_R		25	nA
			5	μA
			50	μA
Reverse Breakdown Voltage at	$V_{(BR)R}$	100		V
		75		V
Capacitance at $V_R = 0, f = 1\text{ MHz}$	C_{tot}		4	pF
Voltage Rise when Switching ON tested with 50 mA Forward Pulses $t_p = 0.1\text{ s}$, Rise Time $< 30\text{ ns}$, $f_p = 5\text{ to }100\text{ KHz}$	V_{fr}		2.5	V
Reverse Recovery Time at $I_F=10\text{mA}$ to $I_R=1\text{mA}$, $V_R=6\text{V}$, $R_L=100\Omega$	t_{rr}		4	ns
Thermal Resistance Junction to Ambient Air	R_{thA}		0.35 ¹⁾	K/mW
Rectification Efficiency at $f = 100\text{ MHz}$, $V_{RF}=2\text{V}$	η_V	0.45		

CHARACTERISTIC CURVES

Fig.1 Forward characteristics

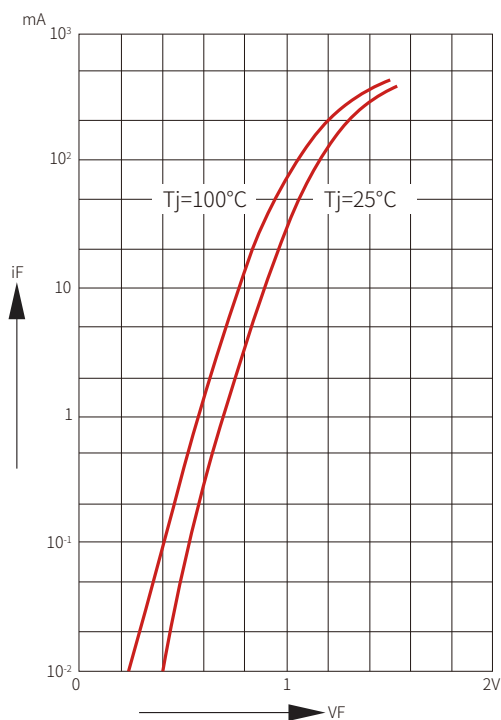


Fig.2 Dynamic forward resistance versus forward current

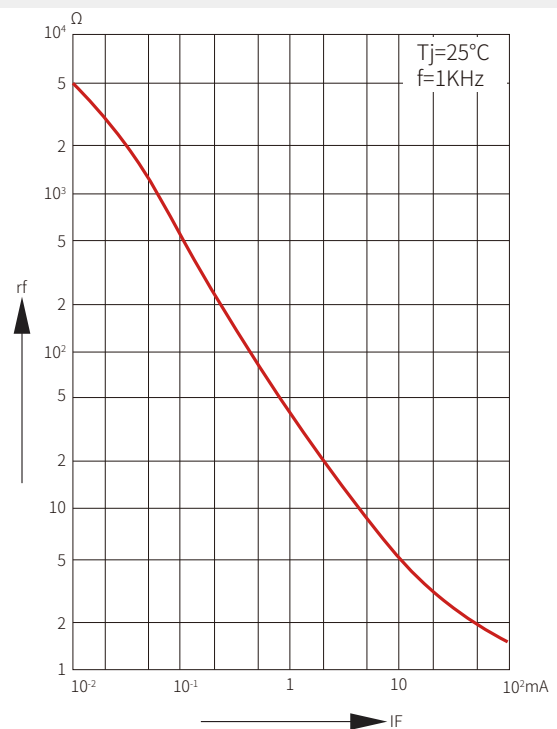


Fig.3 Admissible power dissipation versus ambient temperature

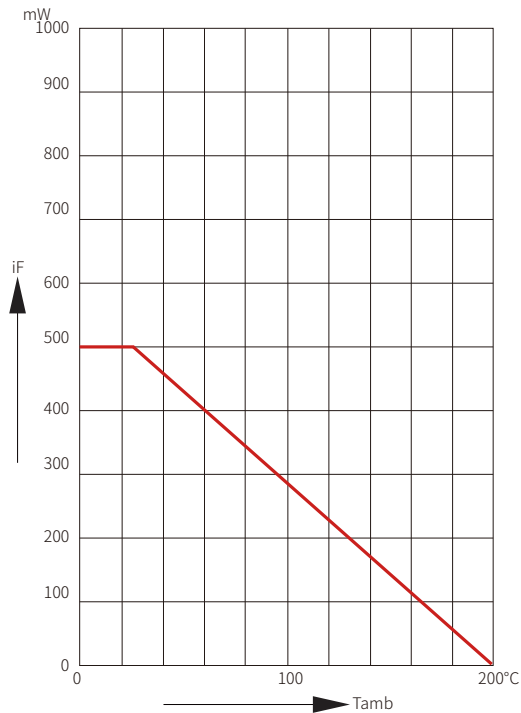


Fig.4 Relative capacitance versus reverse voltage

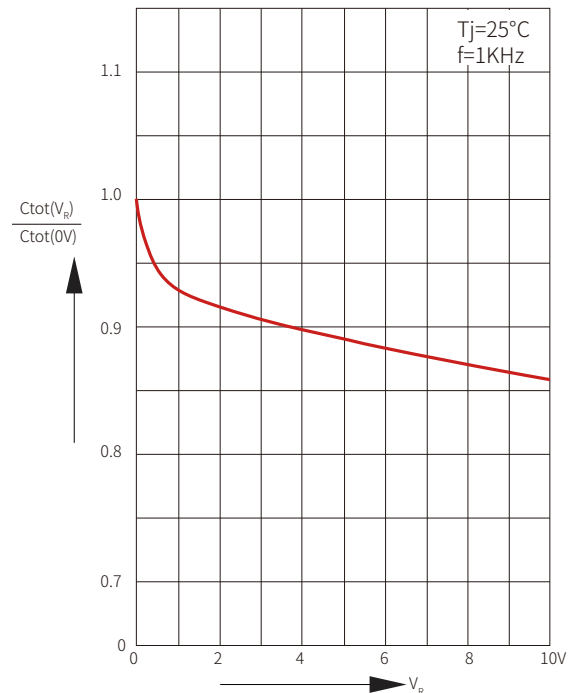


Fig.5 Leakage current versus junction temperature



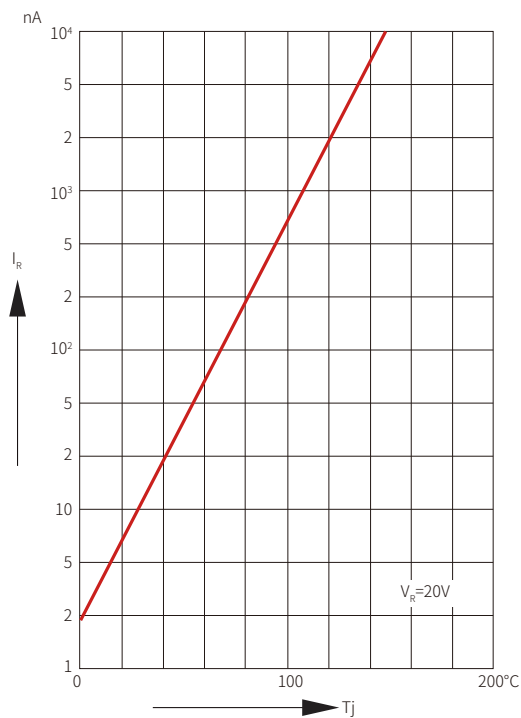



Fig.6 Admissible repetitive peak forward current versus pulse duration


WAVE SOLDERING

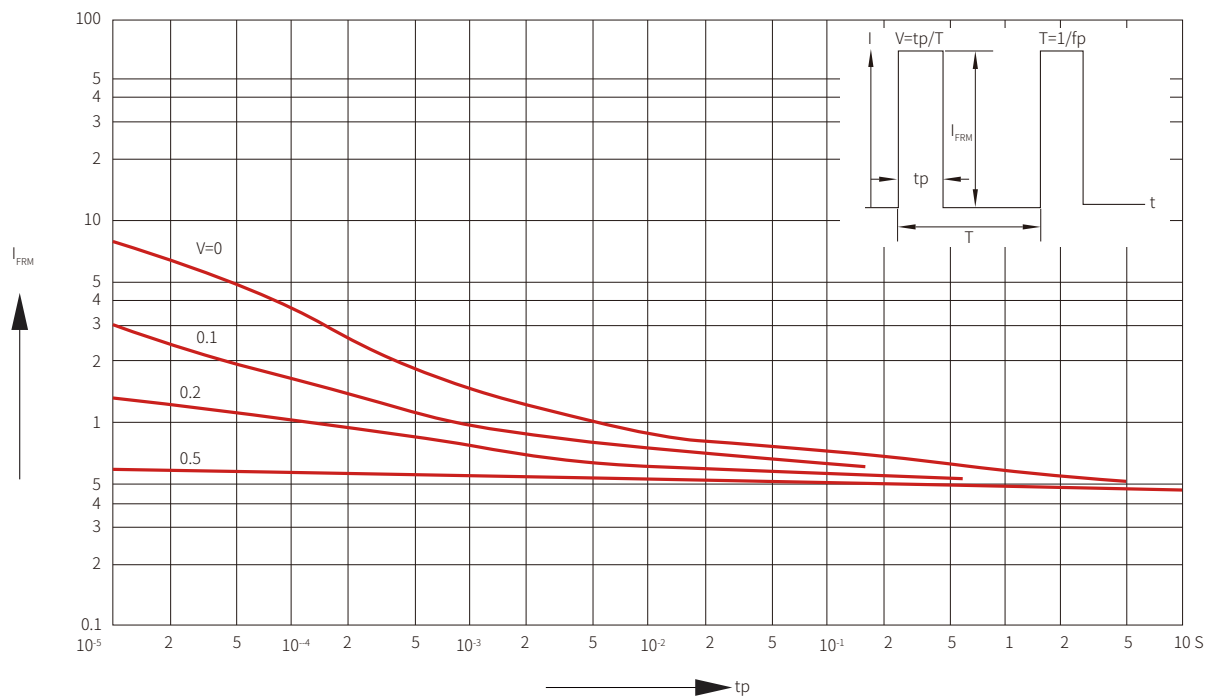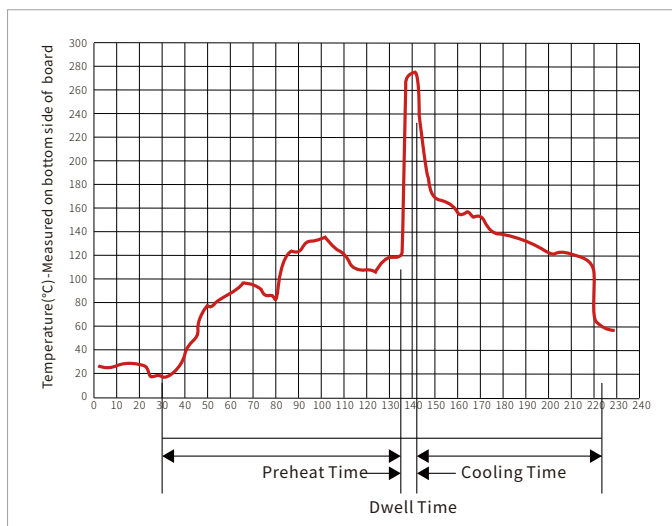

Wave Parameter		Lead-free assembly
Pre Heat	Temperature Min	100°C
	Temperature Max	150°C
	Time(min to max)	60 – 180 secs
Solder pot Temperature		280°C Max
Solder Dwell Time		2-5 seconds

DO-35 PACKAGE INFORMATION

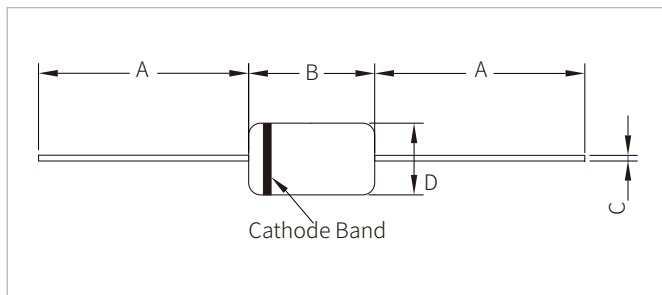

Ref.	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	25.40	-	1.00	-
B	-	3.35	-	0.132
C	-	0.43	-	0.017
D	-	1.70	-	0.067

ORDERING INFORMATION

Part Number	Marking	Component Package	Per Carton	Description
1N4148	1N4148	DO-35	5000pcs	Box

Headquarters

No.3387 Shendu Road
Pujiang I&E Park
Minhang Shanghai China
201000

Hotline

400-021-5756

Web

<https://www.semiware.com>

Sales Center

Tel: 86-21-3463-7458
Email: sales18@semiware.com

Customer Service

Tel: 86-21-5484-1001
Email: sales17@semiware.com

Technical Support

Tel: 86-21-3463-7654
Email: fae01@semiware.com

Complaint & Suggestions

Tel: 86-21-3463-7172
Ext: 8868
Email: cs03@semiware.com

By QR Code

Website



Wechat

To find your local partner within Semiware's global website: www.semiware.com

© 2022 Semiware Semiconductor Inc.

The content of this document has been carefully checked and understood. However, neither Semiware nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Semiware does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Chinese law and resulting disputes shall be settled by the courts at the place of business of Semiware. Latest publications and a complete disclaimer can be downloaded from the Semiware website. All trademarks recognized.