

FEATURES

Super Small Size

High Reliability





APPLICATIONS

| Car Ignition Systems

APPROVALS

RoHS Compliance with 2011/65/EU


HF Compliance with IEC61249-2-21:2003


MAXIMUM RATINGS AND CHARACTERISTICS ($T_A = 25$ °C)

Parameter		Symbol	2CL0504	Unit
Marking			T0504	
Repetitive Peak Reverse Voltage		V _{RRM}	4	KV
Non-Repetitive Peak Reverse Voltage		V _{RSM}	4.4	KV
Average Forward Current 60Hz half-sine wave, Resistance load, Ta=25°C		I _{F(AV)}	50	mA
Non-Repetitive Forward Surge Current 60HZ half-sine wave, 1cycle,Ta=25°C		I _{FSM}	3	А
Reverse Surge Current W _p =1ms, Rectangular-wave, One-shot, Ta=25°C		I _{RSM}	50	mA
Peak Forward Voltage I _{FM} =10mA		V _{FM}	7	V
Peak Reverse Current V _{RM} =V _{RRM}	T _a =25°C	1	2	
	T _a =175°C	RRM	30	μΑ
Avalanche Breakdown Voltage I _R =100μA		V _(BR)	≥5.5	KV
Thermal resistance T _{amb} =T _{lead} , lead length=10mm		R _{(th)J-A}	100	°C/W
Storage Temperature		T _{stg}	-65~+175	°C
Virtual junction temperature		T _(Vj)	175	°C




CHARACTERISTIC CURVES

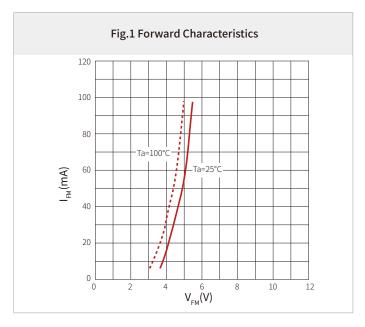

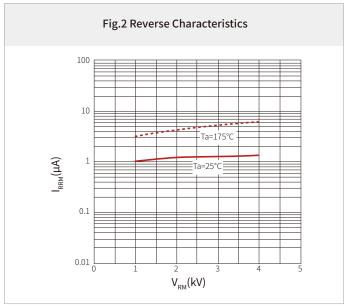


WAVE SOLDERING

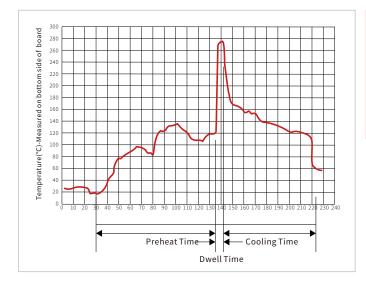

Wave Parameter		Lead-free assembly
Pre Heat	Temperature Min	100°C
	Temperature Max	150°C
	Time(min to max)	60 – 180 secs
Solder pot Temperature		280°C Max
Solder Dwell Time		2-5 seconds



DO-206 PACKAGE INFORMATION

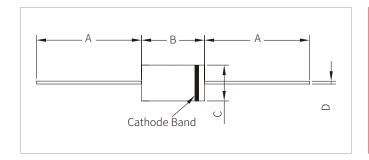

Ref.	Millimeters		Inches	
	Min.	Max.	Min.	Max.
А	25.75	-	1.013	-
В	6.3	6.7	0.248	0.264
С	2.3	2.7	0.094	0.106
D	0.47	0.53	0.019	0.021

ORDERING INFORMATION

Part Number	Component Package	QTY/Box
2CL0504	DO-206	5000PCS



Headquarters

No.3387 Shendu Road Pujiang I&E Park Minhang Shanghai China 201000

Hotline 400-021-5756

Web

Https://www.semiware.com

Sales Center

Tel: 86-21-3463-7458

Email: sales18@semiware.com

Customer Service

Tel: 86-21-5484-1001

Email: sales17@semiware.com

Technical Support

Tel: 86-21-3463-7654

Email: fae01@semiware.com

Complaint & Suggestions

Tel: 86-21-3463-7172

Ext: 8868

Email: cs03@semiware.com

By QR Code





Website

Machat

To find your local partner within Semiware's global website: www.semiware.com © 2022 Semiware Semiconductor Inc.

The content of this document has been carefully checked and understood. However, neither Semiware nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Semiware does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Chinese law and resulting disputes shall be settled by the courts at the place of business of Semiware. Latest publications and a complete disclaimer can be downloaded from the Semiware website. All trademarks recognized.