


FEATURES

- | Low profile package
- | Idea for printed circuit board
- | Glass passivated Junction chip
- | High forward surge current capability
- | Low reverse leakage



DO-214AB(SMC)



Schematic Symbol

MECHANICAL DATA

- | Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- | Moisture Sensitivity: Level 1 per J-STD-020
- | Polarity: Cathode line denotes the cathode end

APPROVALS

RoHS	Compliance with 2011/65/EU
HF	Compliance with IEC61249-2-21:2003

MAXIMUM RATINGS AND CHARACTERISTICS (T_A=25°C)

Parameter		Symbol	ES5DC	ES5GC	ES5JC	Unit
Marking			ES5D	ES5G	ES5J	
Maximum Repetitive Peak Reverse Voltage		V _{RRM}	200	400	600	V
Maximum RMS Voltage		V _{RMS}	140	280	420	
Maximum DC Blocking Voltage		V _{DC}	200	400	600	
Maximum Average Forward Rectified Current		I _{F(AV)}	5			A
Surge Peak Forward Current Single Half Sine-wave Superimposed On Rated Load	8.3 mS at T _A =25°C	I _{FSM}	164			
	1.0 mS at T _A =25°C		364			
Junction-to-Lead Thermal Resistance Per Diode		R _{θJL}	25			°C/W
Junction-to-Ambient Thermal Resistance Per Diode		R _{θJA}	54			
Junction-to-Case Thermal Resistance Per Diode		R _{θJC}	18			
Junction Temperature		T _J	-55 to +150			°C
Storage Temperature		T _{STG}	-55 to +150			

Thermal Performance Note: Units mounted on PCB (16mm x 16mm Cu pad test board)

ELECTRICAL CHARACTERISTICS (T_A=25°C)

Parameter		Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Forward voltage ⁽¹⁾	ES5DC	V _F	I _F =2.5A, T _J =25°C	0.82			V
			I _F =5A, T _J =25°C	0.89		0.95	
			I _F =2.5A, T _J =125°C	0.67			
			I _F =5A, T _J =125°C	0.76		0.85	
	ES5GC		I _F =2.5A, T _J =25°C	0.95			
			I _F =5A, T _J =25°C	1.08		1.30	
			I _F =2.5A, T _J =125°C	0.77			
			I _F =5A, T _J =125°C	0.92		1.10	
	ES5JC		I _F =2.5A, T _J =25°C	1.10			
			I _F =5A, T _J =25°C	1.36		1.70	
			I _F =2.5A, T _J =125°C	0.83			
			I _F =5A, T _J =125°C	0.96		1.20	
Reverse current @ rated V _R ⁽²⁾		I _R	T _J =25°C			10	μA
			T _J =125°C			200	
Reverse recovery time		t _{rr}	I _F =0.5A, I _R =1.0A, I _{rr} =0.25A			35	ns
Junction capacitance	ES5DC	C _J	1MHz, V _R =4.0V	185			pF
	ES5GC			123			
	ES5JC			71			

Notes: (1) Pulse test with PW=0.3 ms (2) Pulse test with PW=30 ms

CHARACTERISTIC CURVES

Fig. 1- Forward Current Derating Curve

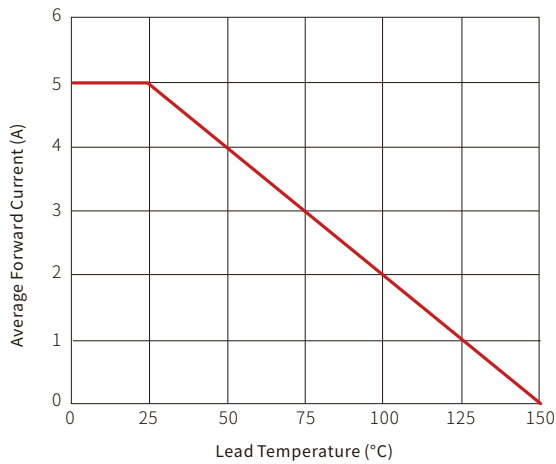


Fig. 2-Typical Junction Capacitance

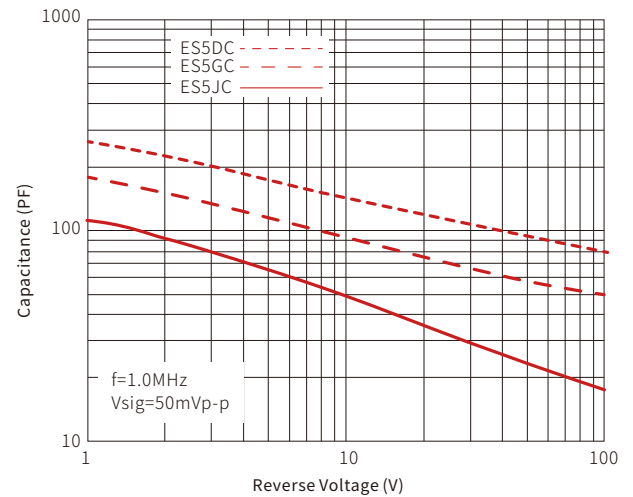


Fig. 3-Typical Reverse Characteristics


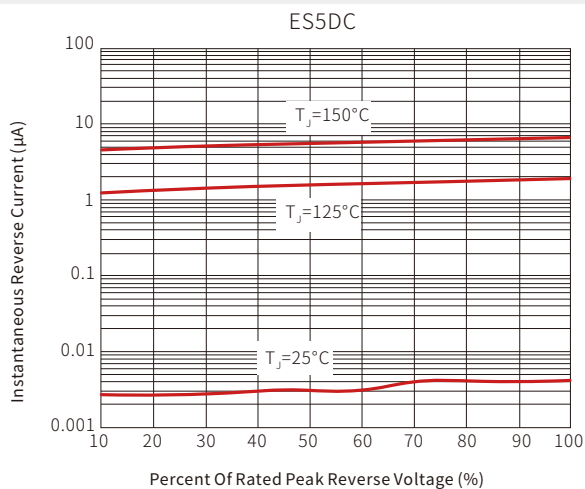


Fig. 4-Typical Forward Characteristics

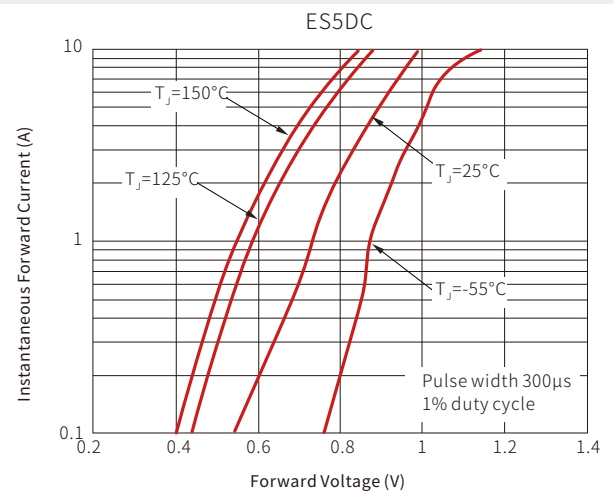

CHARACTERISTIC CURVES

Fig. 5-Typical Reverse Characteristics

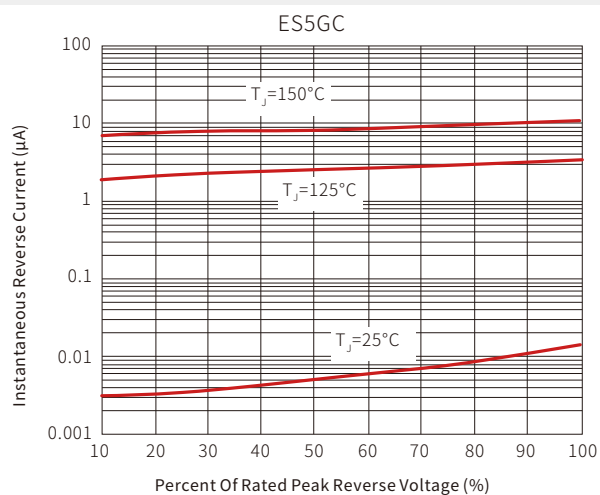


Fig. 6-Typical Forward Characteristics

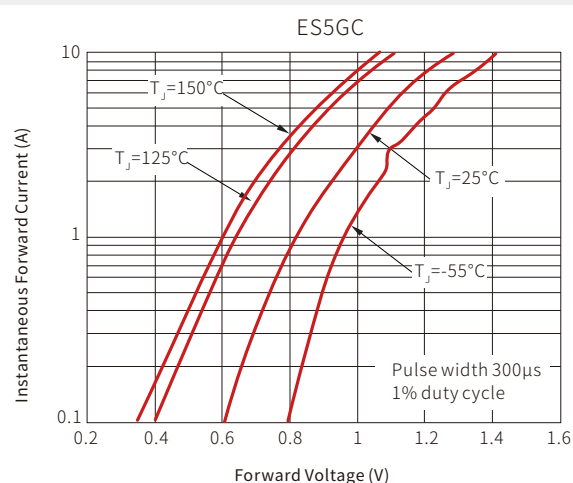


Fig. 7-Typical Reverse Characteristics



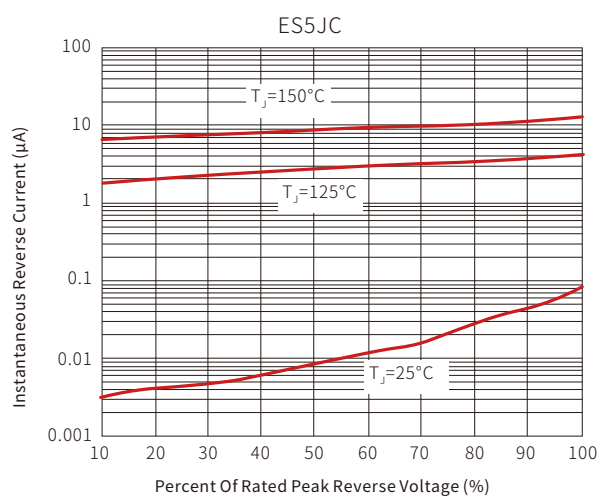


Fig. 8-Typical Forward Characteristics

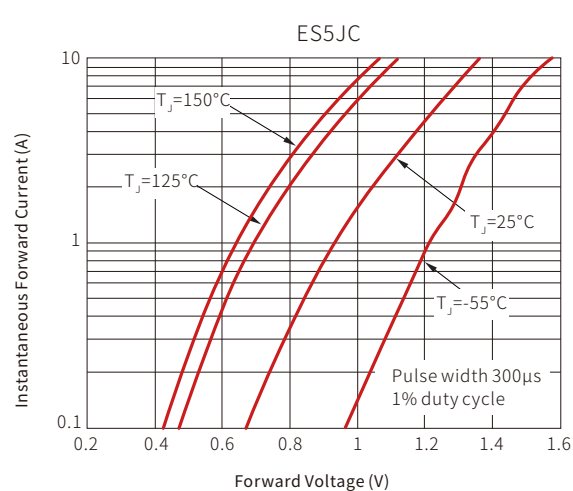


SOLDERING PARAMETERS

Reflow Condition		Lead-free assembly
Pre Heat	Temperature Max ($T_{s(min)}$)	150°C
	Temperature Max ($T_{s(max)}$)	200°C
	Time (min to max) (t_s)	60 – 180 secs
Average ramp up rate (Liquidus Temp (T_L) to peak		3°C/second max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/second max
Reflow	Temperature (T_L) (Liquidus)	217°C
	Time (min to max) (t_L)	60 – 150 seconds
Peak Temperature (T_p)		260°C
Time within 5°C of actual peak Temperature (t_p)		20 – 40 seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature (T_p)		8 minutes max.
Do not exceed		260°C

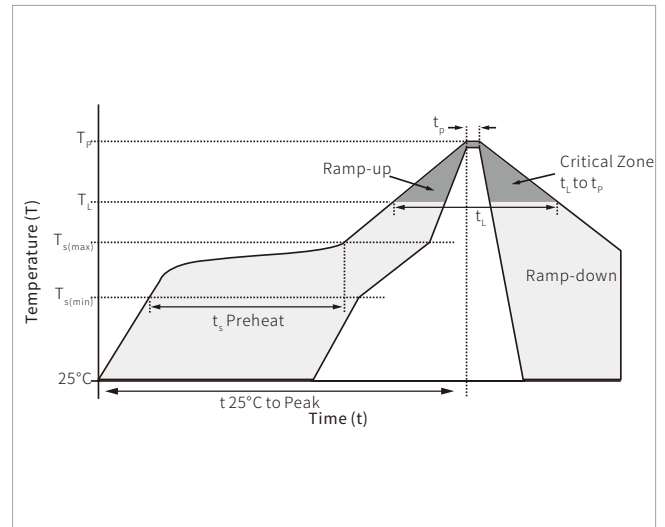


DO-214AB(SMC) PACKAGE INFORMATION

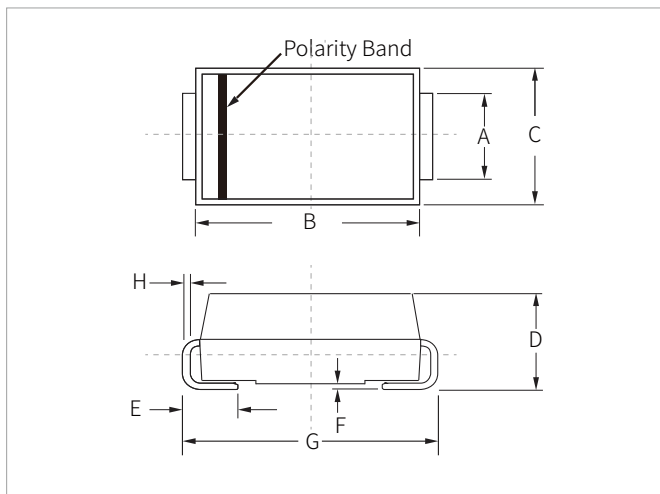

Ref.	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	2.80	3.20	0.110	0.126
B	6.60	7.20	0.260	0.283
C	5.70	6.10	0.224	0.240
D	2.15	2.75	0.085	0.108
E	1.00	1.60	0.039	0.063
F	0.02	0.20	0.000	0.008
G	7.60	8.00	0.299	0.315
H	0.15	0.30	0.006	0.012

RECOMMENDED PAD LAYOUT DIMENSIONS

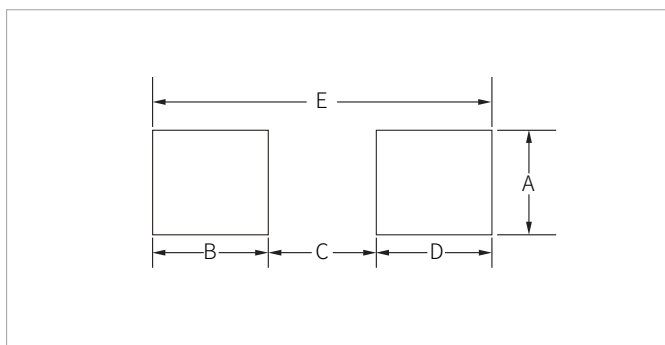

Ref.	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	3.30	-	0.129	-
B	2.40	-	0.094	-
C	-	4.20	-	0.165
D	2.40	-	0.094	-
E	8.20REF		0.323REF	

ORDERING INFORMATION

Part Number	Component Package	QTY/Reel	Reel Size
ES5DC-ES5JC	DO-214AB(SMC)	3000PCS	13"

Headquarters

No.3387 Shendu Road
Pujiang I&E Park
Minhang Shanghai China
201000

Hotline

400-021-5756

Web

<https://www.semiware.com>

Sales Center

Tel: 86-21-3463-7458
Email: sales18@semiware.com

Customer Service

Tel: 86-21-5484-1001
Email: sales17@semiware.com

Technical Support

Tel: 86-21-3463-7654
Email: fae01@semiware.com

Complaint & Suggestions

Tel: 86-21-3463-7172
Ext: 8868
Email: cs03@semiware.com

By QR Code

Website



Wechat

To find your local partner within Semiware's global website: www.semiware.com

© 2022 Semiware Semiconductor Inc.

The content of this document has been carefully checked and understood. However, neither Semiware nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Semiware does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Chinese law and resulting disputes shall be settled by the courts at the place of business of Semiware. Latest publications and a complete disclaimer can be downloaded from the Semiware website. All trademarks recognized.