


FEATURES

- | Glass passivated chip
- | Built-in strain relief
- | Low inductance
- | High peak reverse power dissipation
- | Low reverse leakage
- | For use in stabilizing and clipping with high power rating



DO-214AC(SMA)



Schematic Symbol

MECHANICAL DATA

- | Case : Molded plastic body
- | Polarity : Polarity symbol marking on body
- | Mounting Position : Any

APPROVALS

RoHS	Compliance with 2011/65/EU
HF	Compliance with IEC61249-2-21:2003

MAXIMUM RATINGS ($T_A=25^{\circ}\text{C}$)

Parameter	Symbol	Value	Unit
DC Power dissipation at $T_L = 75^{\circ}\text{C}^{(1)}$	P_D	1.5	W
Maximum forward voltage at $I_F=200\text{mA}$	V_F	1.5	V
Junction temperature range	T_J, T_{STG}	-55 to +150	$^{\circ}\text{C}$
Storage temperature range	T_J, T_{STG}	-55 to +150	$^{\circ}\text{C}$

Note:

(1) T_L =Lead temperature at 3/8" (9.5mm) from body

ELECTRICAL CHARACTERISTICS

Part Number	Device Marking Code	Nominal Zener Voltage @I _T			I _{ZT} (mA)	Maximum Zener Impedance			Maximum Reverse Leakage Current		Maximum DC Zener Current
		V _{Z AVE.} (V)	V _{Z MIN.} (V)	V _{Z MAX.} (V)		Z _{ZT MAX.} (Ω) @I _{ZT}	Z _{ZK MAX.} (Ω) @I _{ZK}	I _{ZK} (mA)	I _R (μA) @V _R	V _R (V)	
SMA5913A	913A	3.3	3.14	3.47	113.6	10.0	500.0	1.00	100.0	1.0	454.0
SMA5914A	914A	3.6	3.42	3.78	104.2	9.0	500.0	1.00	100.0	1.0	416.0
SMA5915A	915A	3.9	3.71	4.10	96.1	7.5	500.0	1.00	50.0	1.0	384.0
SMA5916A	916A	4.3	4.09	4.52	87.2	6.0	500.0	1.00	10.0	1.0	348.0
SMA5917A	917A	4.7	4.47	4.94	79.8	5.0	500.0	1.00	10.0	1.5	319.0
SMA5918A	918A	5.1	4.85	5.36	73.5	4.0	350.0	1.00	10.0	2.0	294.0
SMA5919A	919A	5.6	5.32	5.88	66.9	2.0	250.0	1.00	10.0	3.0	267.0
SMA5920A	920A	6.2	5.89	6.51	60.5	2.0	200.0	1.00	10.0	4.0	241.0
SMA5921A	921A	6.8	6.46	7.14	55.1	2.5	200.0	1.00	10.0	5.2	220.0
SMA5922A	922A	7.5	7.13	7.88	50.0	3.0	400.0	0.50	10.0	6.0	200.0
SMA5923A	923A	8.2	7.79	8.61	45.7	3.5	400.0	0.50	10.0	6.5	182.0
SMA5924A	924A	9.1	8.65	9.56	41.2	4.0	500.0	0.50	10.0	7.0	164.0
SMA5925A	925A	10.0	9.5	10.5	37.5	4.5	500.0	0.25	10.0	8.0	150.0
SMA5926A	926A	11.0	10.45	11.55	34.1	5.5	550.0	0.25	0.5	8.4	136.0
SMA5927A	927A	12.0	11.4	12.6	31.2	6.5	550.0	0.25	0.5	9.1	125.0
SMA5928A	928A	13.0	12.35	13.65	28.8	7.0	550.0	0.25	0.5	9.9	115.0
SMA5929A	929A	15.0	14.25	15.75	25.0	9.0	600.0	0.25	0.5	11.4	100.0
SMA5930A	930A	16.0	15.2	16.8	23.4	10.0	600.0	0.25	0.5	12.2	93.0
SMA5931A	931A	18.0	17.1	18.9	20.8	12.0	650.0	0.25	0.5	13.7	83.0
SMA5932A	932A	20.0	19.0	21.0	18.7	14.0	650.0	0.25	0.5	15.2	75.0
SMA5933A	933A	22.0	20.9	23.1	17.0	17.5	650.0	0.25	0.5	16.7	68.0
SMA5934A	934A	24.0	22.8	25.2	15.6	19.0	700.0	0.25	0.5	18.2	62.0
SMA5935A	935A	27.0	25.65	28.35	13.9	23.0	700.0	0.25	0.5	20.6	55.0
SMA5936A	936A	30.0	28.5	31.5	12.5	26.0	750.0	0.25	0.5	22.8	50.0
SMA5937A	937A	33.0	31.35	34.65	11.4	33.0	800.0	0.25	0.5	25.1	45.0
SMA5938A	938A	36.0	34.2	37.8	10.4	38.0	850.0	0.25	0.5	27.4	41.0
SMA5939A	939A	39.0	37.05	40.95	9.6	45.0	900.0	0.25	0.5	29.7	38.0
SMA5940A	940A	43.0	40.85	45.15	8.7	53.0	950.0	0.25	0.5	32.7	34.0
SMA5941A	941A	47.0	44.65	49.35	8.0	67.0	1000.0	0.25	0.5	35.8	31.0
SMA5942A	942A	51.0	48.45	53.55	7.3	70.0	1100.0	0.25	0.5	38.8	29.0
SMA5943A	943A	56.0	53.2	58.8	6.7	86.0	1300.0	0.25	0.5	42.6	26.0

Part Number	Device Marking Code	Nominal Zener Voltage @ I_T			I_{ZT} (mA)	Maximum Zener Impedance			Maximum Reverse Leakage Current		Maximum DC Zener Current
		$V_{Z,AVE.}$ (V)	$V_{Z,MIN.}$ (V)	$V_{Z,MAX.}$ (V)		$Z_{ZT,MAX.}$ (Ω) @ I_{ZT}	$Z_{ZK,MAX.}$ (Ω) @ I_{ZK}	I_{ZK} (mA)	I_R (uA) @ V_R	V_R (V)	
SMA5944A	944A	62.0	58.9	65.1	6.0	100.0	1500.0	0.25	0.5	47.1	24.0
SMA5945A	945A	68.0	64.6	71.4	5.5	120.0	1700.0	0.25	0.5	51.7	22.0
SMA5946A	946A	75.0	71.25	78.75	5.0	140.0	2000.0	0.25	0.5	56.0	20.0
SMA5947A	947A	82.0	77.9	86.1	4.6	160.0	2500.0	0.25	0.5	62.2	18.0
SMA5948A	948A	91.0	86.45	95.55	4.1	200.0	3000.0	0.25	0.5	69.2	16.0
SMA5949A	949A	100.0	95.0	105.0	3.7	250.0	3100.0	0.25	0.5	76.0	15.0
SMA5950A	950A	110.0	104.0	115.5	3.4	300.0	4000.0	0.25	0.5	83.6	13.0
SMA5951A	951A	120.0	114.0	126.0	3.1	380.0	4500.0	0.25	0.5	91.2	12.0
SMA5952A	952A	130.0	123.5	136.5	2.9	450.0	5000.0	0.25	0.5	98.8	11.0
SMA5953A	953A	150.0	142.5	157.5	2.5	600.0	6000.0	0.25	0.5	114.0	10.0
SMA5954A	954A	160.0	152.0	168.0	2.3	700.0	6500.0	0.25	0.5	121.6	9.0
SMA5955A	955A	180.0	171.0	189.0	2.1	900.0	7000.0	0.25	0.5	136.8	8.0
SMA5956A	956A	200.0	190.0	210.0	1.9	1200.0	8000.0	0.25	0.5	152.0	7.0

CHARACTERISTIC CURVES

Fig.1-Power Temperature Derating Curve

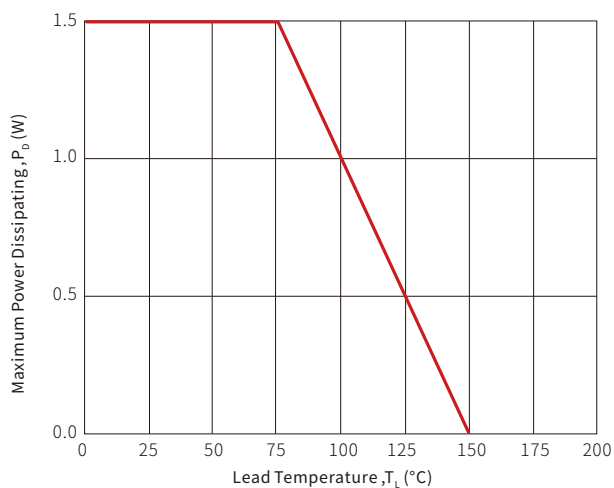


Fig.2-Temperature Coefficients v.s. Zener Voltage

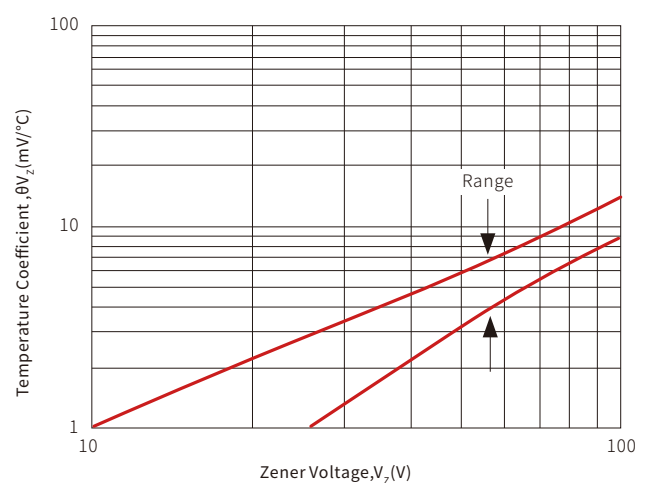
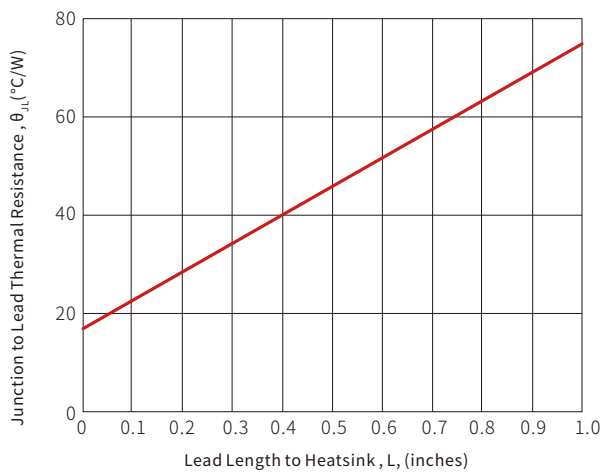
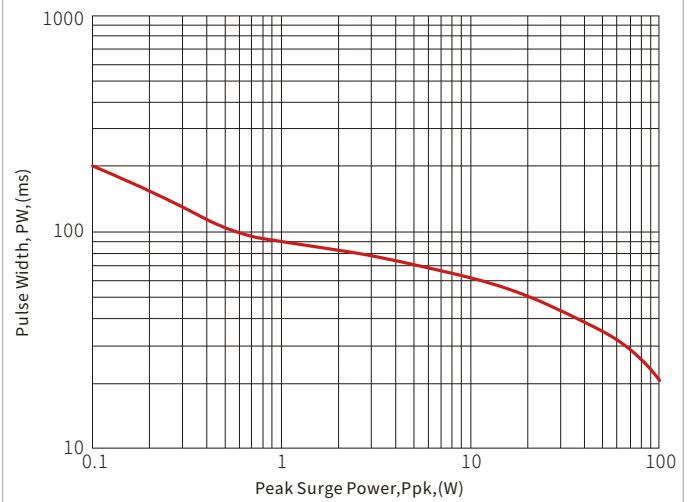
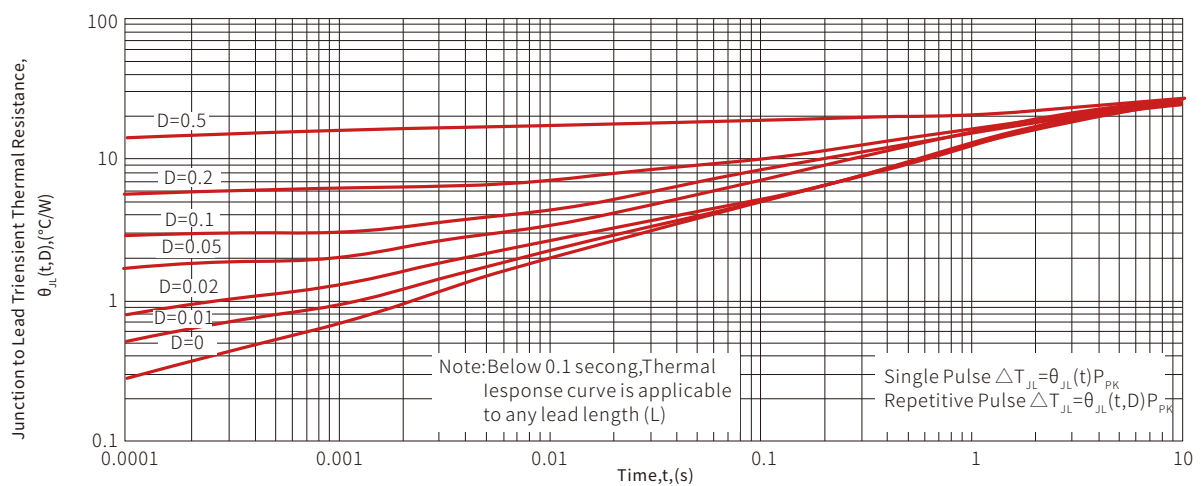
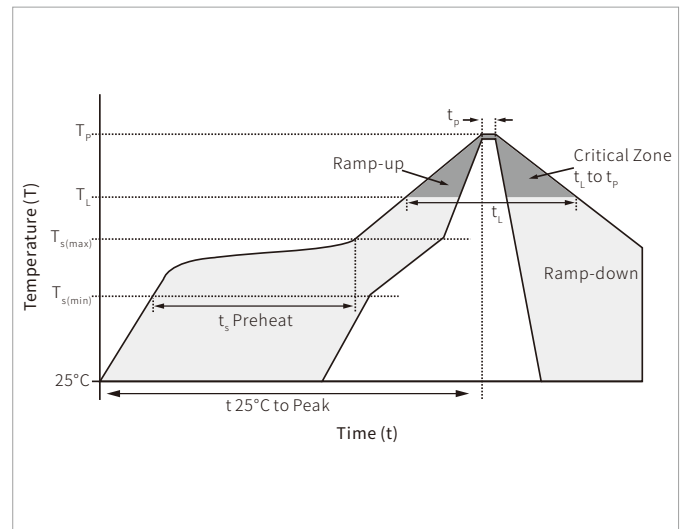



Fig.3-Typical thermal Resisttance v.s, Lead Length

Fig.4-Maximum Surge Power

Fig.5-Typical Thermal Response L , Lead Length=3/8inch


SOLDERING PARAMETERS

Reflow Condition		Lead-free assembly
Pre Heat	Temperature Max ($T_{s(min)}$)	150°C
	Temperature Max ($T_{s(max)}$)	200°C
	Time (min to max) (t_s)	60 – 180 secs
Average ramp up rate (Liquidus Temp (T_L) to peak		3°C/second max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/second max
Reflow	Temperature (T_L) (Liquidus)	217°C
	Time (min to max) (t_L)	60 – 150 seconds
Peak Temperature (T_p)		260°C
Time within 5°C of actual peak Temperature (t_p)		20 – 40 seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature (T_p)		8 minutes max.
Do not exceed		260°C

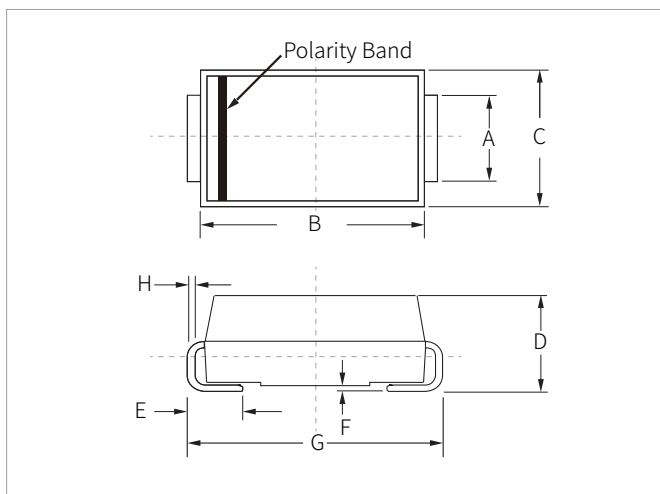


DO-214AC(SMA) PACKAGE INFORMATION



Ref.	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	1.20	1.60	0.047	0.063
B	4.20	4.60	0.165	0.181
C	2.40	2.80	0.094	0.110
D	2.00	2.40	0.079	0.094
E	0.76	1.52	0.030	0.060
F	0.02	0.20	0.001	0.008
G	4.85	5.25	0.191	0.207
H	0.15	0.30	0.006	0.012

RECOMMENDED PAD LAYOUT DIMENSIONS

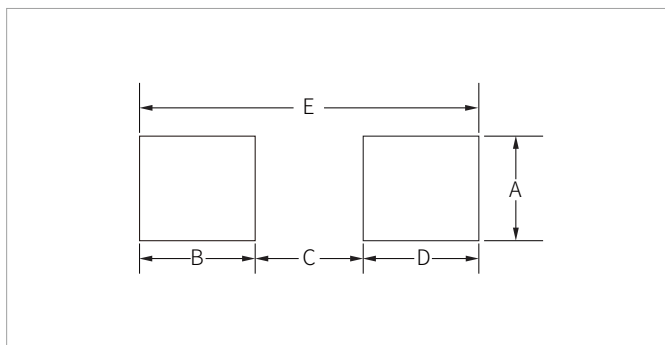

Ref.	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	1.63	-	0.064	-
B	1.45	-	0.057	-
C	-	2.80	-	0.090
D	1.45	-	0.057	-
E	5.28REF		0.208REF	

ORDERING INFORMATION

Part Number	Component Package	QTY/Reel	Reel Size
SMA59-A	DO-214AC(SMA)	5000PCS	13"

Headquarters

No.3387 Shendu Road
Pujiang I&E Park
Minhang Shanghai China
201000

Hotline

400-021-5756

Web

<https://www.semiware.com>

Sales Center

Tel: 86-21-3463-7458
Email: sales18@semiware.com

Customer Service

Tel: 86-21-5484-1001
Email: sales17@semiware.com

Technical Support

Tel: 86-21-3463-7654
Email: fae01@semiware.com

Complaint & Suggestions

Tel: 86-21-3463-7172
Ext: 8868
Email: cs03@semiware.com

By QR Code

Website



Wechat

To find your local partner within Semiware's global website: www.semiware.com

© 2022 Semiware Semiconductor Inc.

The content of this document has been carefully checked and understood. However, neither Semiware nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Semiware does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Chinese law and resulting disputes shall be settled by the courts at the place of business of Semiware. Latest publications and a complete disclaimer can be downloaded from the Semiware website. All trademarks recognized.