

FEATURES


- Surface Mount Package Ideally Suited for Automatic Insertion
- Very Low reverse leakage



SOD-123

MECHANICAL DATA

- SOD-123 Small Outline Plastic Package
- Polarity: Color band denotes cathode end
- Mounting Position: Any



Marking



Schematic Symbol

APPROVALS

RoHS	Compliance with 2011/65/EU
HF	Compliance with IEC61249-2-21:2003

MAXIMUM RATINGS ($T_A=25^{\circ}\text{C}$)

Parameter		Symbol	Value	Unit
Reverse Breakdown Voltage		V_{RRM}	130	V
Working Peak Reverse Voltage		V_{RWM}	130	
DC Blocking Voltage		V_R	130	
RMS Reverse Voltage		$V_{R(RMS)}$	90	V
Power Dissipation(note 2)		P_d	250	mW
Forward Continuous Current		I_{FM}	215	mA
Repetitive Peak Forward Current		I_{FRM}	500	mA
Thermal Resistance from Junction to Ambient		$R_{\theta JA}$	500	$^{\circ}\text{C}/\text{W}$
Peak Forward Surge Current $T_A=25^{\circ}\text{C}$	tp=1.0us	I_{FSM}	4.0	A
	tp=1.0ms		1.0	
	tp=1.0s		0.5	
Junction Temperature		T_J	-55 ~ +150	$^{\circ}\text{C}$
Storage Temperature Range		T_{STG}	-65 ~ +150	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS($T_A=25^{\circ}\text{C}$)

Parameter	Test Condition	Symbol	Min.	Typ.	Max.	Unit
Reverse Voltage(note 1)	$I_R = 100\mu\text{A}, T_J = 25^{\circ}\text{C}$	V_{BR}	130			V
	$I_R = 100\mu\text{A}, T_J = 125^{\circ}\text{C}$		130			
Reverse Leakage Current(note 1)	$V_R = 75\text{V}, T_J = 25^{\circ}\text{C}$	I_R			5.0	nA
	$V_R = 75\text{V}, T_J = 125^{\circ}\text{C}$				80	
Forward Voltage(note 1)	$I_F = 1.0\text{mA}, T_J = 25^{\circ}\text{C}$	V_F			0.9	V
	$I_F = 10\text{mA}, T_J = 25^{\circ}\text{C}$				1.0	
	$I_F = 50\text{mA}, T_J = 25^{\circ}\text{C}$				1.1	
	$I_F = 150\text{mA}, T_J = 25^{\circ}\text{C}$				1.25	
	$I_F = 10\text{mA}, T_J = 125^{\circ}\text{C}$				1.0	
Total Capacitance	$V_R = 0\text{V}, f = 1\text{MHz}$	C_T		2.4	5	pF
Reverse Recovery Time	$I_F = I_R = 10\text{mA}$ $I_{rr} = 0.1 \times I_R, R_L = 100\Omega$	t_{rr}			3	μs

Notes: 1. Short duration pulse to minimize self-heating effect
 2. Part mounted on FR-4 PC board with recommended pad layout.

CHARACTERISTIC CURVES

Fig 1. Power Derating Curve

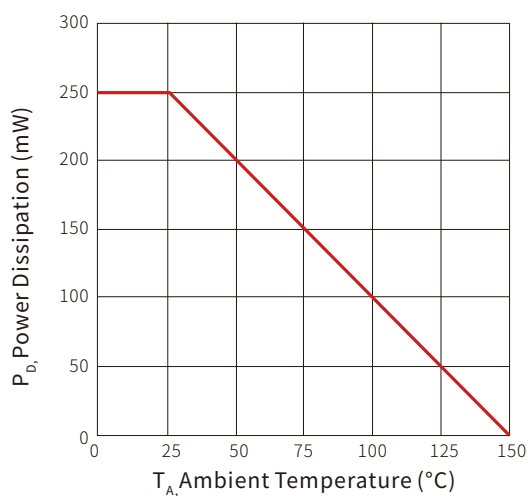


Fig 2. Current Derating Curve




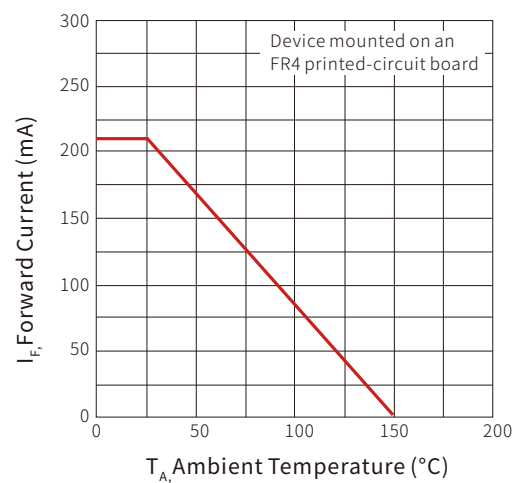



Fig 3. Typical Forward Characteristics

Fig 4. Typical Reverse Characteristics


SOLDERING PARAMETERS

Reflow Condition		Lead-free assembly
Pre Heat	Temperature Max ($T_{s(min)}$)	150°C
	Temperature Max ($T_{s(max)}$)	200°C
	Time (min to max) (t_s)	60 – 180 secs
Average ramp up rate (Liquidus Temp (T_L) to peak)		3°C/second max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/second max
Reflow	Temperature (T_L) (Liquidus)	217°C
	Time (min to max) (t_L)	60 – 150 seconds
Peak Temperature (T_p)		260°C
Time within 5°C of actual peak Temperature (t_p)		20 – 40 seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature (T_p)		8 minutes max.
Do not exceed		260°C

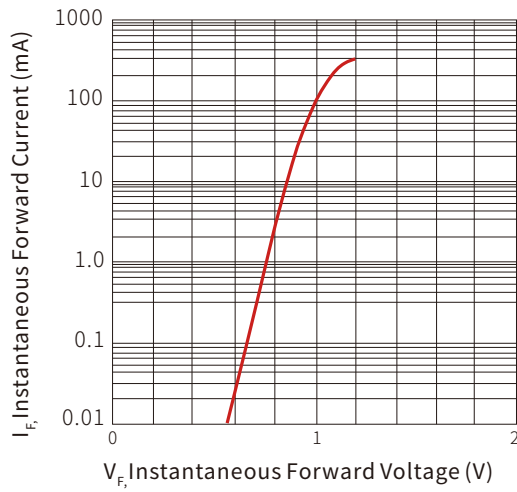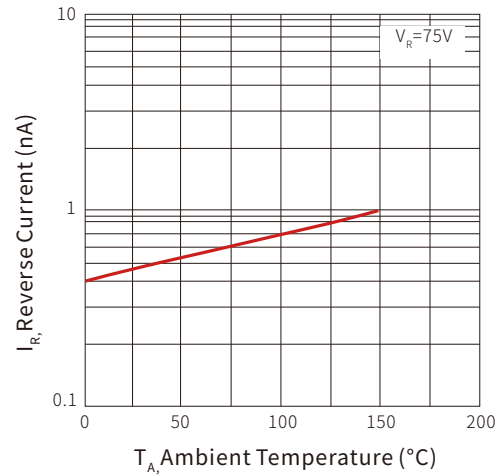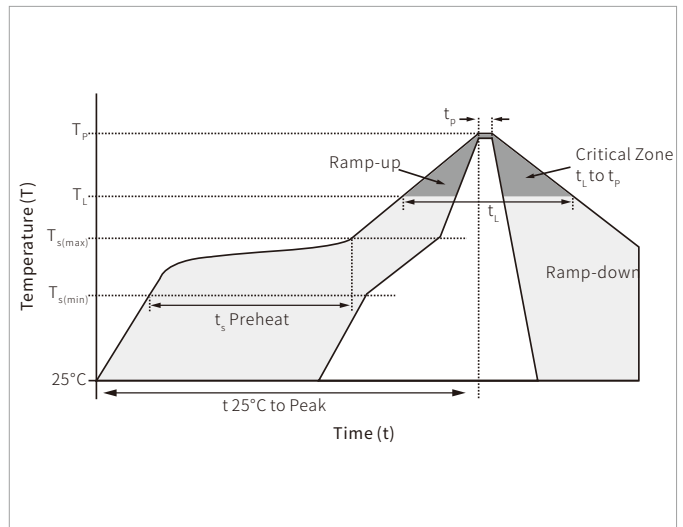


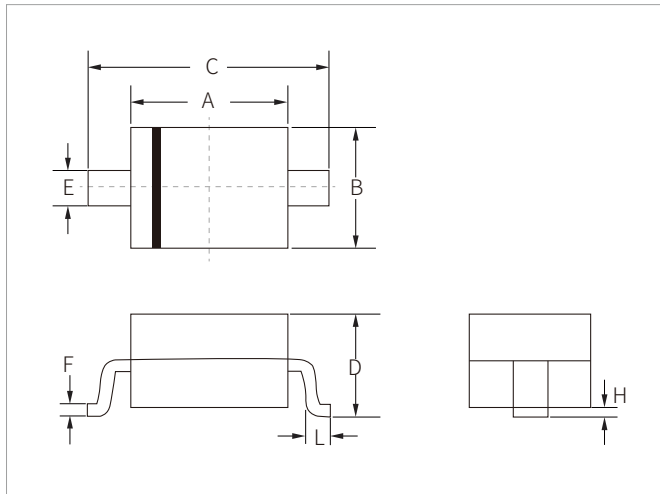SOD-123 PACKAGE INFORMATION



Ref.	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	2.60	2.80	0.102	0.110
B	1.50	1.70	0.059	0.067
C	3.55	3.85	0.140	0.152
D	1.05	1.25	0.041	0.049
E	0.45	0.65	0.018	0.026
F	0.08	0.15	0.003	0.006
H	0.00	0.10	0.000	0.004
L	0.25	0.45	0.010	0.018

RECOMMENDED PAD LAYOUT DIMENSIONS

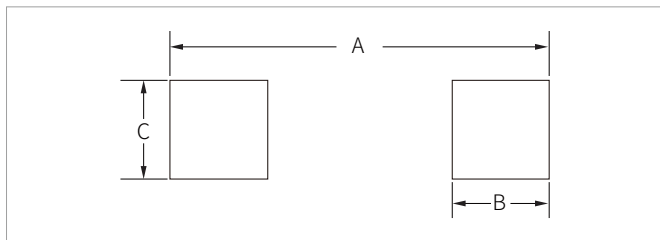

Ref.	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	4.00	4.30	0.157	0.169
B	0.75	0.85	0.030	0.033
C	0.95	1.05	0.037	0.041

ORDERING INFORMATION

Part Number	Component Package	QTY/Reel	Reel Size
SSD116W	SOD-123	3000PCS	7"

Headquarters

No.3387 Shendu Road
Pujiang I&E Park
Minhang Shanghai China
201000

Hotline

400-021-5756

Web

<https://www.semiware.com>

Sales Center

Tel: 86-21-3463-7458
Email: sales18@semiware.com

Customer Service

Tel: 86-21-5484-1001
Email: sales17@semiware.com

Technical Support

Tel: 86-21-3463-7654
Email: fae01@semiware.com

Complaint & Suggestions

Tel: 86-21-3463-7172
Ext: 8868
Email: cs03@semiware.com

By QR Code

Website



Wechat

To find your local partner within Semiware's global website: www.semiware.com

© 2022 Semiware Semiconductor Inc.

The content of this document has been carefully checked and understood. However, neither Semiware nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Semiware does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Chinese law and resulting disputes shall be settled by the courts at the place of business of Semiware. Latest publications and a complete disclaimer can be downloaded from the Semiware website. All trademarks recognized.